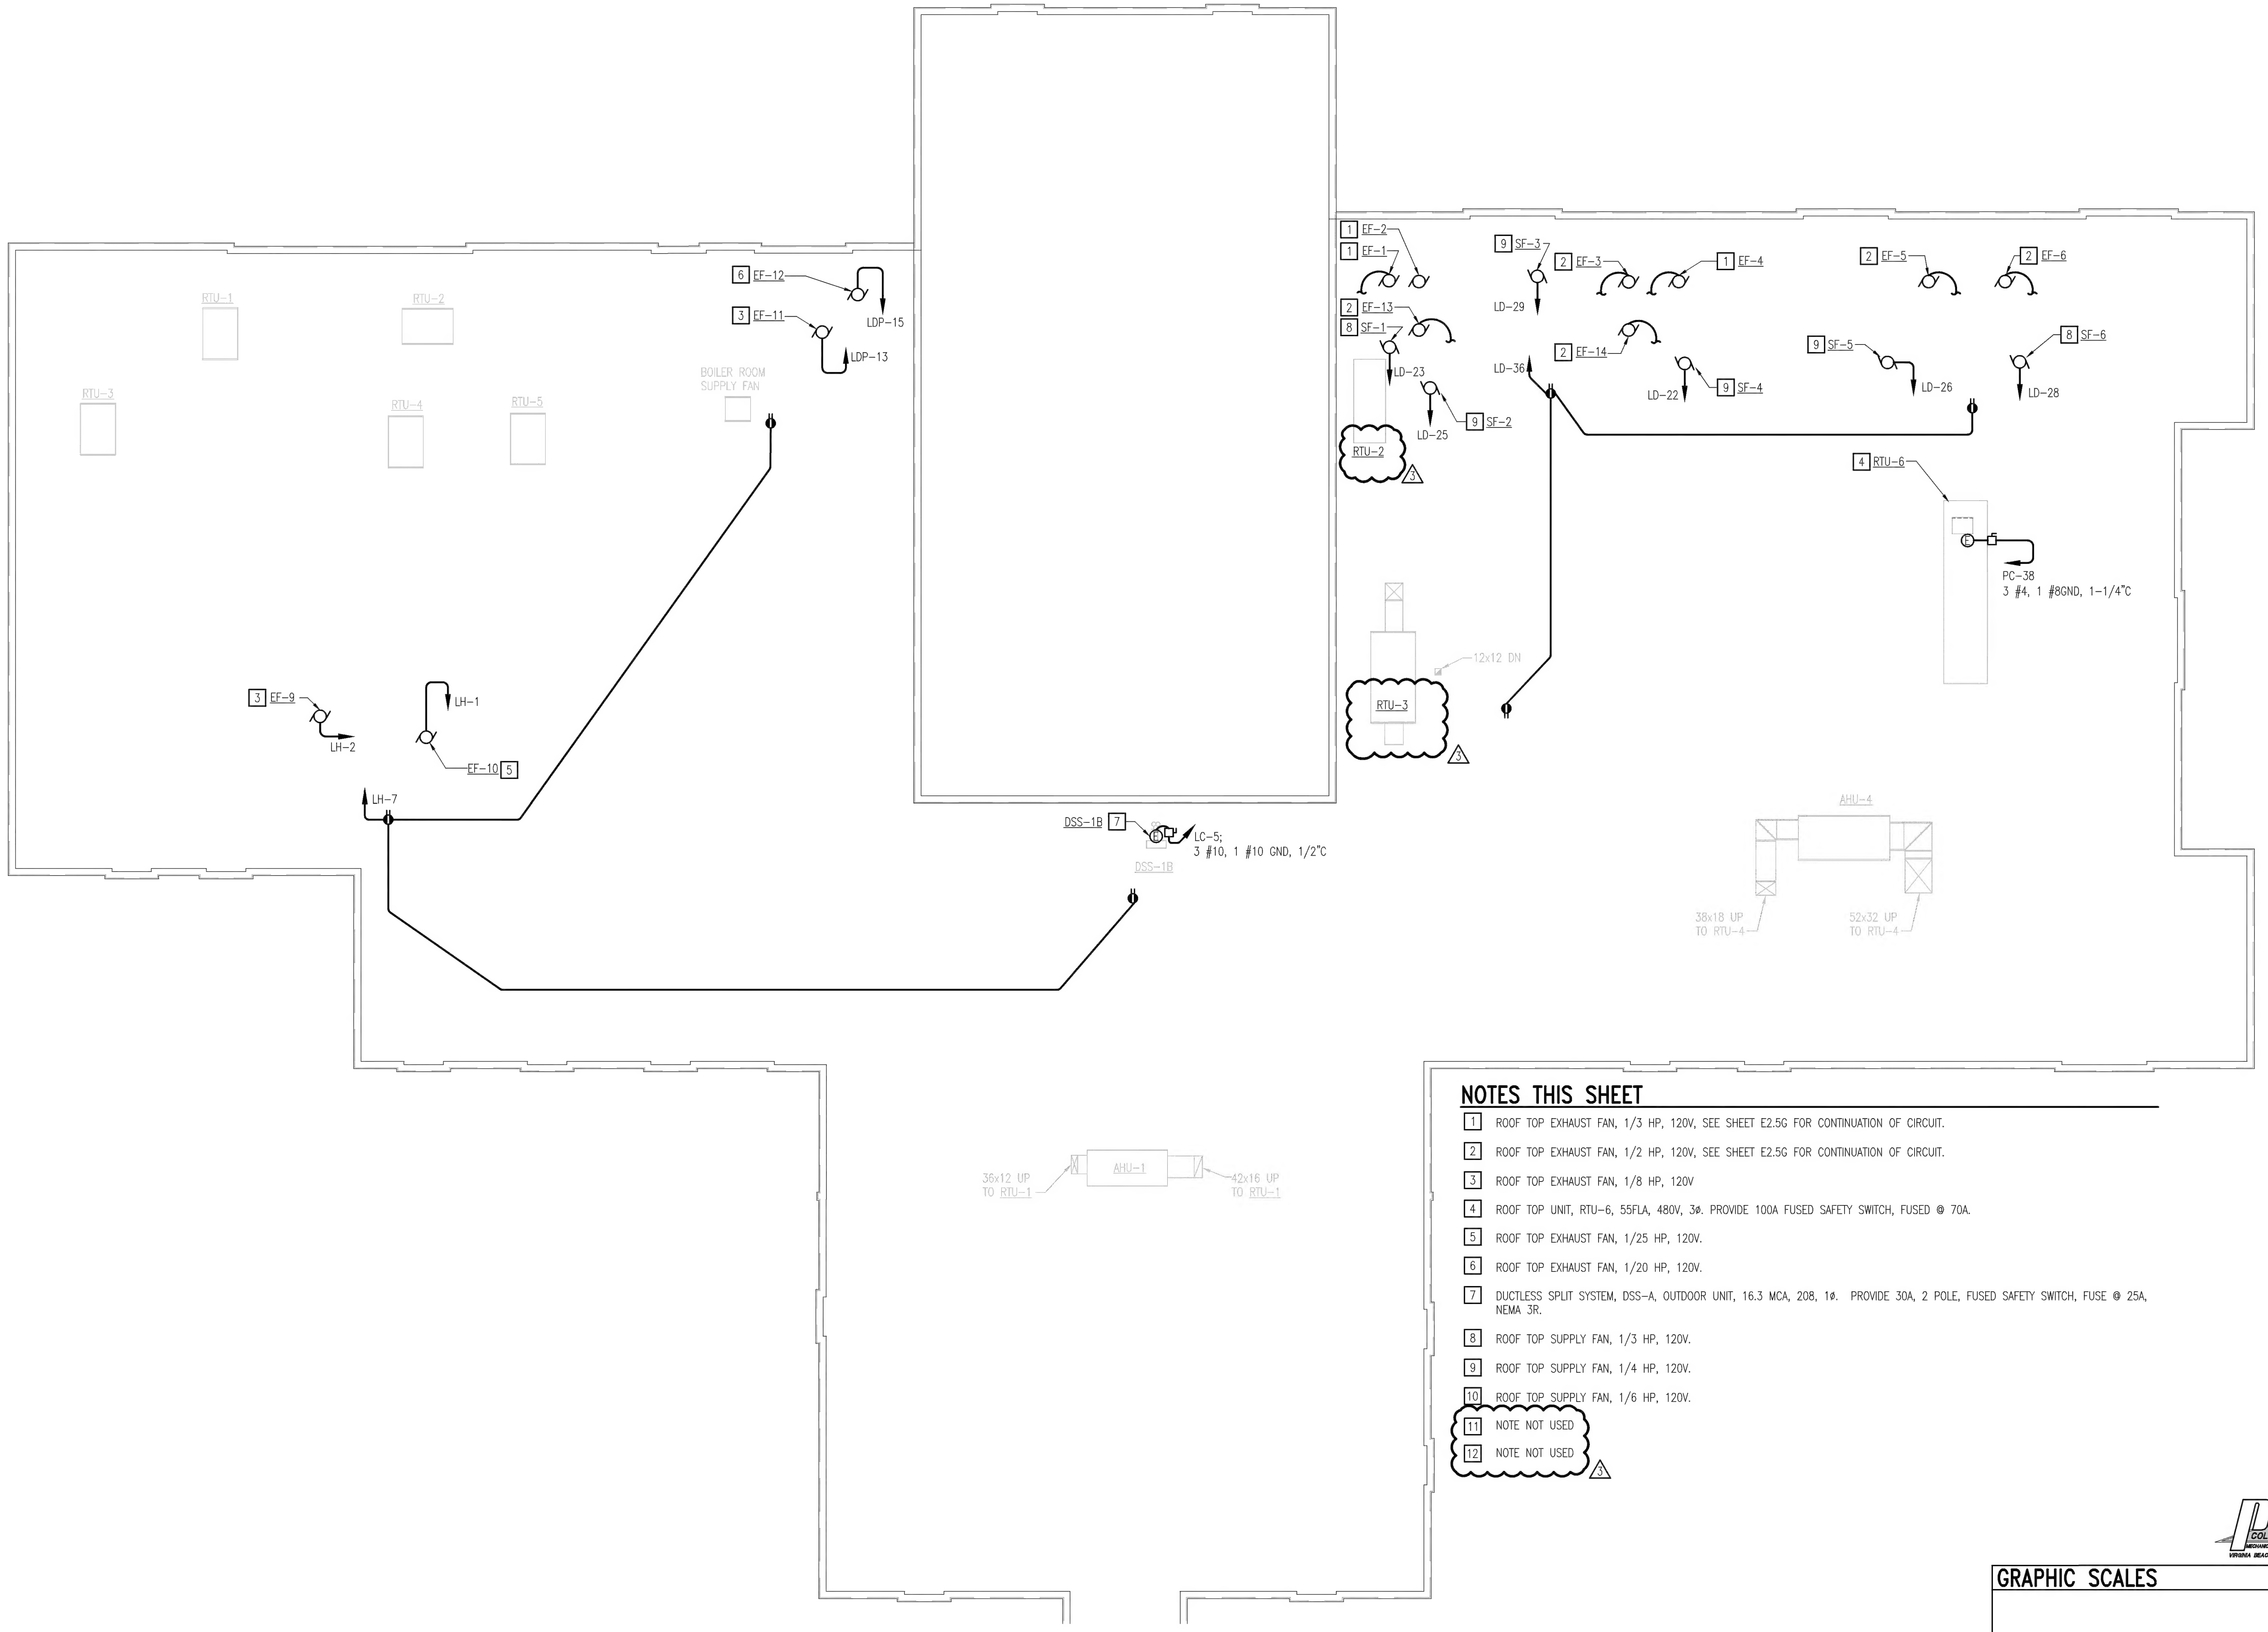

NOTES THIS SHEET

1. ROOF TOP EXHAUST FAN, 1/3 HP, 120V, SEE SHEET E2.5G FOR CONTINUATION OF CIRCUIT.
2. ROOF TOP EXHAUST FAN, 1/2 HP, 120V, SEE SHEET E2.5G FOR CONTINUATION OF CIRCUIT.
3. ROOF TOP EXHAUST FAN, 1/8 HP, 120V
4. ROOF TOP UNIT, RTU-6, 55FLA, 480V, 3Ø. PROVIDE 100A FUSED SAFETY SWITCH, FUSED @ 70A.
5. ROOF TOP EXHAUST FAN, 1/25 HP, 120V.
6. ROOF TOP EXHAUST FAN, 1/20 HP, 120V.
7. DUCTLESS SPLIT SYSTEM, DSS-A, OUTDOOR UNIT, 16.3 MCA, 208, 1Ø. PROVIDE 30A, 2 POLE, FUSED SAFETY SWITCH, FUSE @ 25A, NEMA 3R.
8. ROOF TOP SUPPLY FAN, 1/3 HP, 120V.
9. ROOF TOP SUPPLY FAN, 1/4 HP, 120V.
10. ROOF TOP SUPPLY FAN, 1/6 HP, 120V.
11. NOTE NOT USED
12. NOTE NOT USED

3

NEW WORK ROOF PLAN – ELECTRICAL

SCALE: 3/32" = 1'-0"

GRAPHIC SCALES

3/32" = 1'-0" 5' 0' 5' 10' 20' 30'

Pace COLLABORATIVE
MECHANICAL ELECTRICAL ENGINEERS
VIRGINIA BEACH, VA - 757-499-7223

nbj ARCHITECTURE
A Professional Limited Company
GROVE PARK SQUARE
11537-B NUCKOLS ROAD
Richmond, Virginia 23059
(804) 273-9811 fax: (804) 273-9843

RAPPAHANNOCK COMMUNITY COLLEGE

CAMPUS RENOVATIONS
WARSAW + GLENNS, VIRGINIA
PC: 260-17712

GLENNS CAMPUS NEW WORK ROOF PLAN - ELECTRICAL

Date: APRIL 21, 2010

REVISIONS	
NO.	DATE
1	FEBRUARY 9, 2010
2	MARCH 3, 2010
3	APRIL 21, 2010

COMMONWEALTH OF VIRGINIA
JAMES S. BEDOIS
Lic. No. 032929
4-21-10
PROFESSIONAL ENGINEER

Sheet
E2.1G
File Number